

Standalone Fingerprint Keypad System DG-ea400



Standard Features

- Slim and narrow surface mounted
- 100 Fingerprints capability
- 100 users, 1 to 6 digit PIN codes
- Keypad tamper lockout
- Red, green and yellow LED for status and programming feedback
- Configurable audible annunciator: keypad entry, door ajar, tamper lockout, keypad active
- Fail-secure or Fail-safe capable
- Request to Exit, alarm, door sensor


PROX Only

3 User Modes:

- Fingerprint or PIN
- Fingerprint Only
- PIN Only

DG-ea400

Model	Descriptions
DG-ea400	Standalone fingerprint keypad system

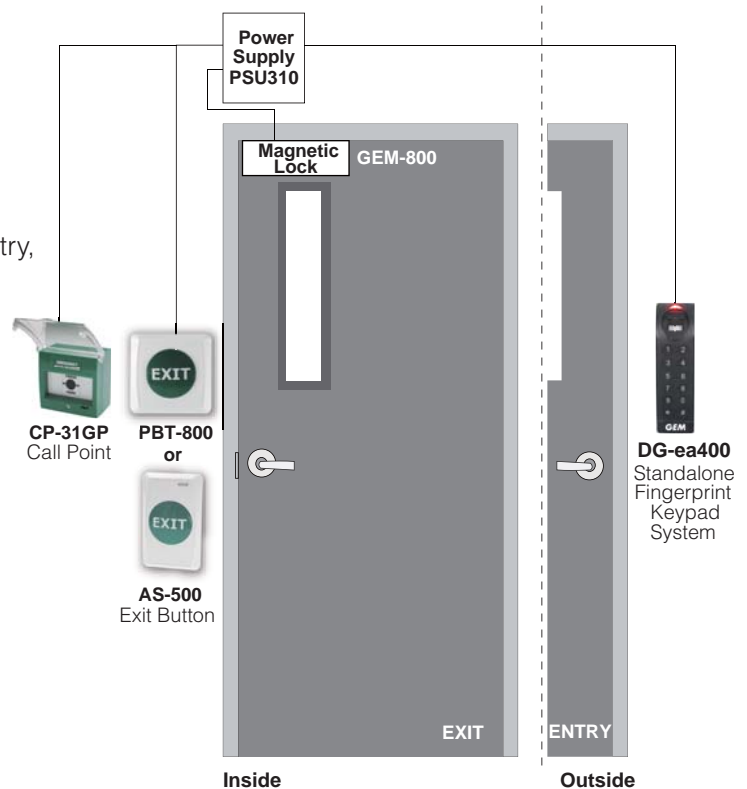

Specifications

Voltage	Current	Alarm Output	Relay	Keypad Output	Wiring	Temperature	Humidity	Color	Dimensions
12~24VAC/DC @2A	Up to 80 mA	5VDC @ 25mA	12VDC @ 2A	32-bit Wiegand	Pigtail	14°F~149°F (-10°C ~ +65°C)	0% to 95% non-condensing	Black	44 W x 150 H x 36 D mm