

Mini Access Controls

MCT-8960

Mini Access Controller



Standard Features


- Compact size, easy to install
- Supports 1 IN reader and 1 OUT reader
- 500 card holder capacity
- 100 PIN codes, 1 to 6 digits
- Tamper lockout function
- Fail-secure or Fail-safe capable
- Request to Exit input, door sensor input, and alarm output
- Supports any brand of keypad/reader with Wiegand output

Specifications

| | |
|----------------------|--------------------------------|
| Voltage | 12 to 24 VDC/AC |
| Current | 100mA |
| Keypad Output | 32-bit Wiegand |
| Temperature | 14°F to 149°F (-10°C to +65°C) |
| Humidity | 0% to 95% Non-condensing |
| Dimensions | 54 W x 86 H x 12 D mm |

Access Modes

- Card or Code, Card only, Code only

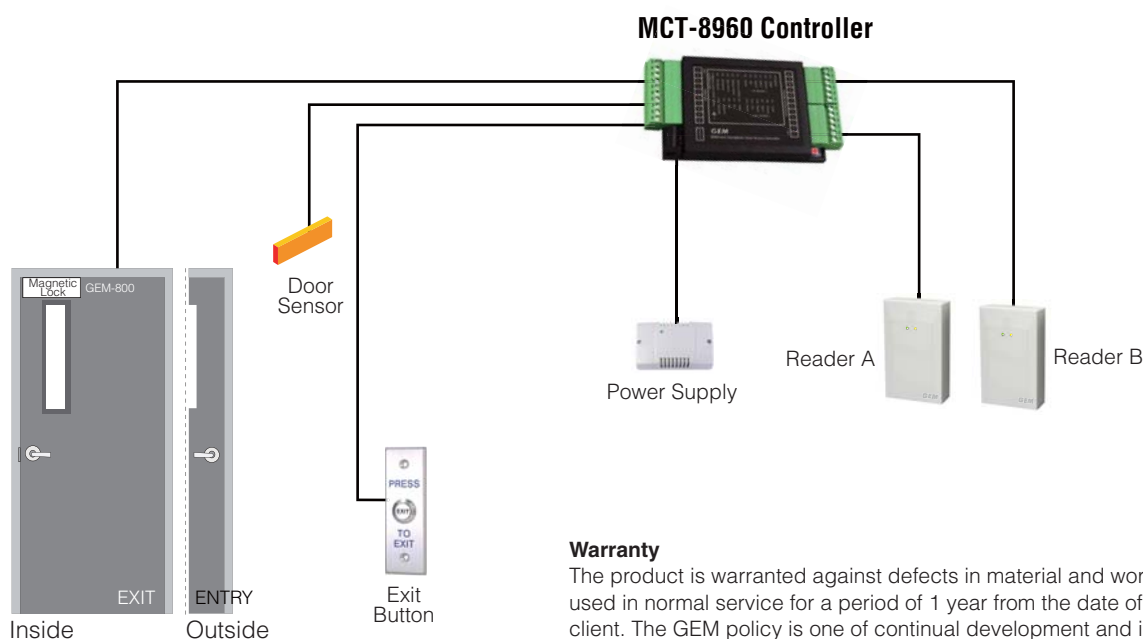

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.