


Wireless Exit Device

Convenient and Quick Egress

RF Hopping Code Controller Features

- Designed to control automatic doors or electrified locks with code-hopping technology
- Bi-color LED to indicate transgression: Green (Power), Red (input/output)
- Low battery buzzer alarm
- Compatible up to 15 transmitters
- Selectable relock time delay

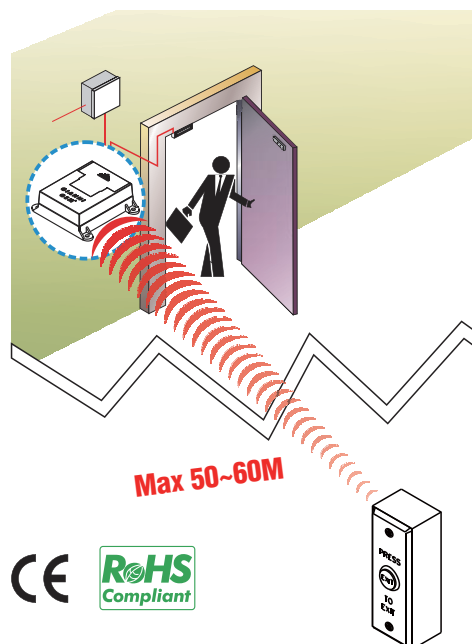

Transmitter Specifications

- Battery voltage 12VDC
- Frequency 433.3MHZ
- Battery life max. 13,000 cycles
- Transmitting distance 50 ~ 60 meters

RF Hopping Code Controller

Transmitters

 <p>S-RC-WPB-025JS</p> <ul style="list-style-type: none"> • Voltage: 12~24 VDC • SPDT Rating: 3A/120VAC, 3A/24VDC • Relay Strike Time: 1,3,5,10 seconds • 83 (L) x 62(W) x 30(D) 	 <p>S-TM-WPB-100</p> <ul style="list-style-type: none"> • Remote transmitter • 54.5 (L) x 29.5(W) x 12(D) 	 <p>S-TM-WPB-025JS</p> <ul style="list-style-type: none"> • Surface mount push button • Stainless steel faceplate • Plastic back box • 115 (L) x 40(W) x 32(D) 	 <p>S-TM-WPB-900</p> <ul style="list-style-type: none"> • Push plate exit button • Stainless steel faceplate • Plastic back box • 130 (L) x 130(W) x 49.5(D)
--	---	---	--

Wireless Exit Device Kits

 <p>WPB-100</p>	 <p>WPB-025JS</p>	 <p>WPB-900</p>
---	---	---

All dimensions in mm