

Shear Locks

Shear Aligning Electromagnetic Lock Hidden Strength at Any Angle with Its Flexible Mounting Options Solutions



GS200

GS705

GS705N

GEM shear locks offer totally concealed mechanism and are designed for applications where the door swings up to a 180 degree. When the shear lock detects the door in the closed position, the magnet “sucks” the armature plate up and traps the armature plate in the lock frame. Generally a 2 -3 mm gap between the top of the door and the frame is optimum for the electromagnet to attract the armature plate and keep the door locked.

The built-in bond sensor indicates proper armature contact, and eliminates potential lock misalignment before the magnet is permitted to energize.

Standard Features

- Suitable for narrow frames, double swing doors and glass doors
- Fail-safe
- Horizontal or vertical installation
- Surface /Mortise/Semi-Mortise mounted
- Bond sensor indicates door is locked or unlocked (GS200 is available with optional bond sensor)













Optional Features

- Mounting brackets available for easy installation (For GS200, 705-35)

Patents, Approvals, and Listings


- UL listed: BP9692 (GS200, GS200M)
- CE : EC3D0909-02

Shear Locks

Models	Voltage (VDC)	Bond Sensor	Holding Force (lbs.)	Relock Time Delay	Door Gap	Mount	Optional Brackets
GS200  	12/24	—	1200	—	1/16" (2mm)	Mortise, Semi-Mortise, Surface	SMB-200
GS200M  	12/24	●	1200	—	1/16" (2mm)	Mortise, Semi-Mortise, Surface	SMB-200
GS200VGL  	12/24	—	1200	—	1/16" (2mm)	Surface, Semi-Mortise	SMB-200 UBK-182
GS200MVGL  	12/24	●	1200	—	1/16" (2mm)	Surface, Semi-Mortise	SMB-200 UBK-182
GS705-30 	12 to 24	●	2000	1~6 sec. (Default 3 sec.)	1/8" (3mm)	Mortise	—
GS705-35 	12 to 24	●	2200	1~6 sec. (Default 3 sec.)	1/8" (3mm)	Surface, Mortise, Semi-Mortise	SMB-001
GS705-35TD 	12 to 24	●	2200	1~15 sec. (Default 3 sec.)	1/8" (3mm)	Surface, Mortise, Semi-Mortise	SMB-001
GS705N-30 	12/24	●	1200	—	1/16" (2mm)	Mortise	—

Shear Locks

Dimensions

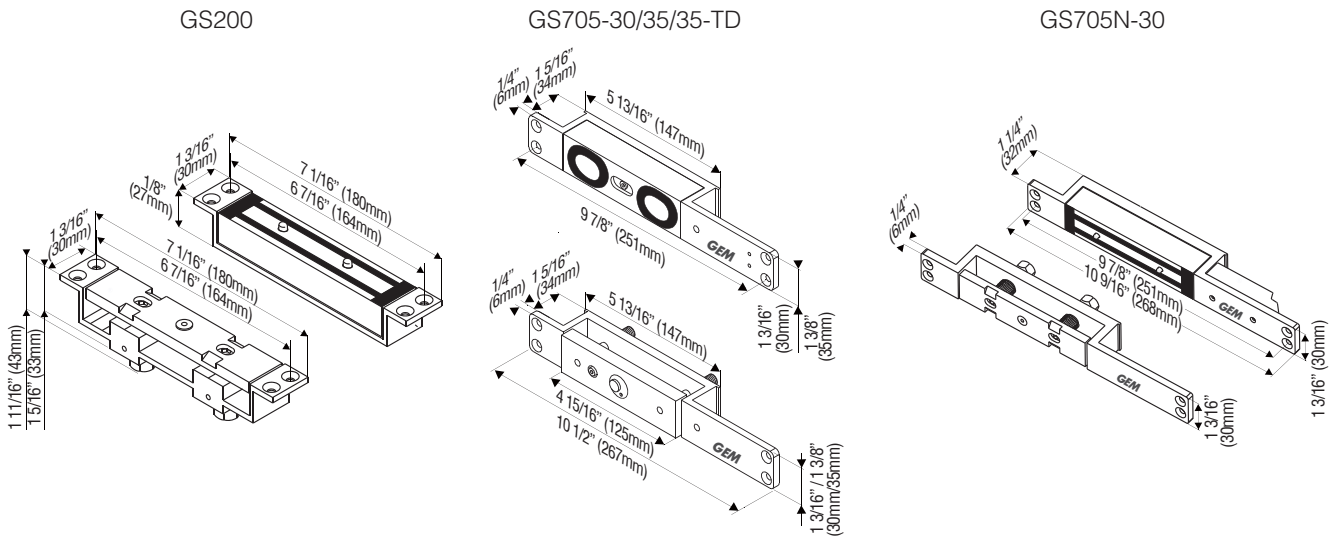

Surface Mount Models & Mounting Brackets

GS200S/GS200MS	GS200VGL/200MVGL (For Glass Doors and Walls)	Mounting brackets for GS705-35/ 35-TD
GS200 + SMB-200 bracket 	GS200 + SMB-200 bracket + UBK-182 bracket 	SMB-001 

Glass thickness: 3/8"~1/2" (10~12mm)